

This document is not an API Standard; it is under consideration within an API technical committee but has not received all approvals required to become an API Standard. It shall not be reproduced or circulated or quoted, in whole or in part, outside of API committee activities except with the approval of the Chairman of the committee having jurisdiction and staff of the API Standards Dept. Copyright API. All rights reserved.

Manual of Petroleum Measurement Standards Chapter 6—Metering Assemblies Section 4A —Lease Automatic Custody Transfer (LACT) Systems

First Edition, XXXX 202~~3~~²

DRAFT

This document is not an API Standard; it is under consideration within an API technical committee but has not received all approvals required to become an API Standard. It shall not be reproduced or circulated or quoted, in whole or in part, outside of API committee activities except with the approval of the Chairman of the committee having jurisdiction and staff of the API Standards Dept. Copyright API. All rights reserved.

FOREWORD

Revision of API MPMS Chapter 6, *Metering Assemblies*, First Edition (202X) is ongoing. The revision supersedes all existing API MPMS Chapter 6 standards with the following four separate standards:

1. API MPMS Chapter 6.1A, *Metering Assemblies – General Considerations*, First Edition (2021)
2. API MPMS Chapter 6.2A, *Truck and Rail Loading and Unloading Measurement Systems*, First Edition (2021)
3. API MPMS Chapter 6.3A, *Pipeline and Marine Loading/Unloading Measurement Systems*, First Edition (2021)
4. API MPMS Chapter 6.4A, [Lease Automatic Custody Transfer \(LACT\) Systems](#)~~LACT Systems~~, First Edition (202X)

Three 6.XA series of Standards have been published and supersede the previous Standards as follows:

1. API MPMS Chapter 6.1A, *Metering Assemblies – General Considerations*, First Edition (2021), is a new standard which specifies the common requirements for all metering systems and does not supersede any other API MPMS Chapter 6 standards.
2. API MPMS Chapter 6.2A, *Truck and Rail Loading and Unloading Measurement Systems*, First Edition (2021), supersedes API MPMS Chapter 6.2, *Loading Rack Metering Systems*, Third Edition (2004), which is withdrawn.
3. API MPMS Chapter 6.3A, *Pipeline and Marine Loading/Unloading Measurement Systems*, First Edition (2021), supersedes API MPMS Chapter 6.5, *Metering Systems for Loading Marine Bulk Carriers*, Second Edition (1991), and API MPMS Chapter 6.6, *Pipeline Metering Systems*, Second Edition (1991), and Section 6.3.5 supersedes API MPMS Chapter 6.7, *Metering Viscous Hydrocarbons*, Second Edition (1991), all of which are withdrawn.

Upon publication of this document:

4. API MPMS Chapter 6.4A, *LACT Systems*, First Edition, supersedes API MPMS Chapter 6.1, *Lease Automatic Custody Transfer (LACT) Systems*, Second Edition (1991), including Addendum 1, August 2020, and Section 6.1.2 of Chapter 6.4A supersedes API MPMS Chapter 6.7, *Metering Viscous Hydrocarbons*, Second Edition (1991), all of which are withdrawn.

This document is not an API Standard; it is under consideration within an API technical committee but has not received all approvals required to become an API Standard. It shall not be reproduced or circulated or quoted, in whole or in part, outside of API committee activities except with the approval of the Chairman of the committee having jurisdiction and staff of the API Standards Dept. Copyright API. All rights reserved.

INTRODUCTION

This standard serves as a guide in the selection, installation, and operation of Lease Automatic Custody Transfer (LACT) metering systems. This standard does not endorse or advocate the preferential use of any specific type of metering system or metering system components.

In general, metering system installations have to meet certain fundamental requirements, including proper selection, sizing, and installation of metering system components, as well as inclusion of adequate protective and readout devices. Descriptions of metering system components are included either in this standard or other API *MPMS* Chapters.

Sections of Chapter 6 describe metering system design, selection, and operation. Section 6.1A describes the general considerations applicable to all metering systems and shall be consulted together with Section 6.4A (this section) when designing, selecting, and operating LACT measurement systems. When aspects are covered under the scope of other chapters of the API Manual of Petroleum Measurement Standards (MPMS), and to avoid replication and conflict, they are not covered by this standard. In these cases, this standard provides limited information and refers the user to those chapters.

For guidance on the design, selection, and operation of truck and rail loading and unloading systems, including truck mounted meters, refer to Section 6.2A. For guidance on the design, selection, and operation of pipeline and marine loading/unloading metering systems, refer to Section 6.3A.

This document is not an API Standard; it is under consideration within an API technical committee but has not received all approvals required to become an API Standard. It shall not be reproduced or circulated or quoted, in whole or in part, outside of API committee activities except with the approval of the Chairman of the committee having jurisdiction and staff of the API Standards Dept. Copyright API. All rights reserved.

1 Scope

This standard is part of a set of documents which detail the minimum requirements for Metering Systems in single phase liquid applications. This standard (Section 6.4A) details the specific requirements for the design, selection, and operation of Lease Automatic Custody Transfer (LACT) metering systems.

2 Normative References

The following referenced documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any addenda) applies.

API MPMS Chapter 4.2, *Proving Systems – Displacement Provers*
API MPMS Chapter 4.4, *Proving Systems – Tank Provers*
API MPMS Chapter 4.5, *Proving Systems – Master Meter Provers*
API MPMS Chapter 4.8, *Proving Systems – Operation of Proving Systems*
API MPMS Chapter 4 (all sections), *Proving Systems*
API MPMS Chapter 5 (all sections), *Metering*
API MPMS Chapter 6.1A, *Metering Assemblies – General Considerations*
API MPMS Chapter 7.4, *Temperature Determination – Dynamic Temperature Measurement*
API MPMS Chapter 8.1, *Standard Practice for Manual Sampling of Petroleum and Petroleum Products*
API MPMS Chapter 8.2, *Standard Practice for Automatic Sampling of Petroleum and Petroleum Products*
API MPMS Chapter 8 (all sections), *Sampling*
API MPMS Chapter 9.4, *Continuous Density Measurement Under Dynamic (Flowing) Conditions*
API MPMS Chapter 9 (all sections), *Density Determination*
API MPMS Chapter 10 (all sections), *Sediment and Water Determination*
API MPMS Chapter 21.2, *Electronic Liquid Volume Measurement Using Positive Displacement and Turbine Meters*

3 Terms, Definitions, [Abbreviations](#) and [Symbols Acronyms](#)

3.1 Terms and Definitions

For the purposes of this document, the following terms and definitions apply. Terms of more general use can be found in the API MPMS Chapter 1 *Online Terms and Definitions Database*.

3.1.1 lease automatic custody transfer (LACT) system

An arrangement of equipment designed for the unattended custody transfer of liquid hydrocarbons from producing leases to the transporting carrier. ~~Arrangement of equipment designed for the unattended custody transfer of liquid hydrocarbons from producing leases to the transporting carrier.~~ Provides the means for determining quantity and quality and the means for fail-safe and tamperproof operation.

NOTE Sometimes referred to as a “LACT Unit”

3.1.2 merchantable oil

Crude oil or condensate which meets a defined specification or criteria within a contractual agreement or regulatory requirement.

This document is not an API Standard; it is under consideration within an API technical committee but has not received all approvals required to become an API Standard. It shall not be reproduced or circulated or quoted, in whole or in part, outside of API committee activities except with the approval of the Chairman of the committee having jurisdiction and staff of the API Standards Dept. Copyright API. All rights reserved.

3.1.3 meter factor linearization

A process to correct a metering device for deviations in performance or trial results over a declared operating range caused by variations in process or operating conditions, such as flowrate or viscosity.

3.1.33.1.4 non-merchantable oil

Crude oil or condensate that does not meet a specification (~~e.g., water content, quality, physical property, etc.~~) that is identified in a contractual agreement or regulatory requirement.

3.1.43.1.5 viscous hydrocarbon

Any liquid hydrocarbon that resists flow because of high shear or tensile stress and therefore may require special treatment or equipment in its handling or storage.

3.1.53.1.6 transporting carrier

Entity or company responsible for receiving and transporting hydrocarbon, typically by means of pipeline, marine vessel, barge, rail car, or truck.

3.1.63.1.7 slip stream sample loop

Low-volume stream diverted from the main pipeline, intended to be representative of the total flowing stream.

3.2 Abbreviations and Acronyms, Abbreviations, and Symbols

ACT – Automatic Custody Transfer

ASME – American Society of Mechanical Engineers

GPA – ~~Gas Processors Association~~ GPA Midstream Association

LACT – Lease Automatic Custody Transfer

NPSH – Net Positive Suction Head

NPSHA – Net Positive Suction Head Available

PLC – Programmable Logic Controller

S&W – Sediment and Water

VFD – Variable Frequency Drive

WCA – Water Cut Analyzer

4 LACT System Overview

A LACT system is an integrated system of primary, secondary, and tertiary measurement components, along with piping and valving, that provides the means to determine the custody transfer quantity, quality, and associated data documented on the measurement ticket. LACT systems typically include additional equipment not always found in a pipeline liquid metering system, such as pumps and motors, pump controls, air eliminators, diverter valves, and water cut analyzers.

The calculation method of the quantity on a measurement ticket (also called quantity transaction record or QTR, batch ticket, or just 'ticket') is dependent upon the type of meter used (volumetric or mass) and the units of measure.

4.1 General LACT Configuration

Figure 1 is a schematic flow diagram showing the principal components of a meter-equipped LACT unit. All items shown may be used in an installation, but if certain components are not required for the measurement of quantity or quality measurement or control, they may be omitted. It is recognized also that other component arrangements are possible.

This document is not an API Standard; it is under consideration within an API technical committee but has not received all approvals required to become an API Standard. It shall not be reproduced or circulated or quoted, in whole or in part, outside of API committee activities except with the approval of the Chairman of the committee having jurisdiction and staff of the API Standards Dept. Copyright API. All rights reserved.

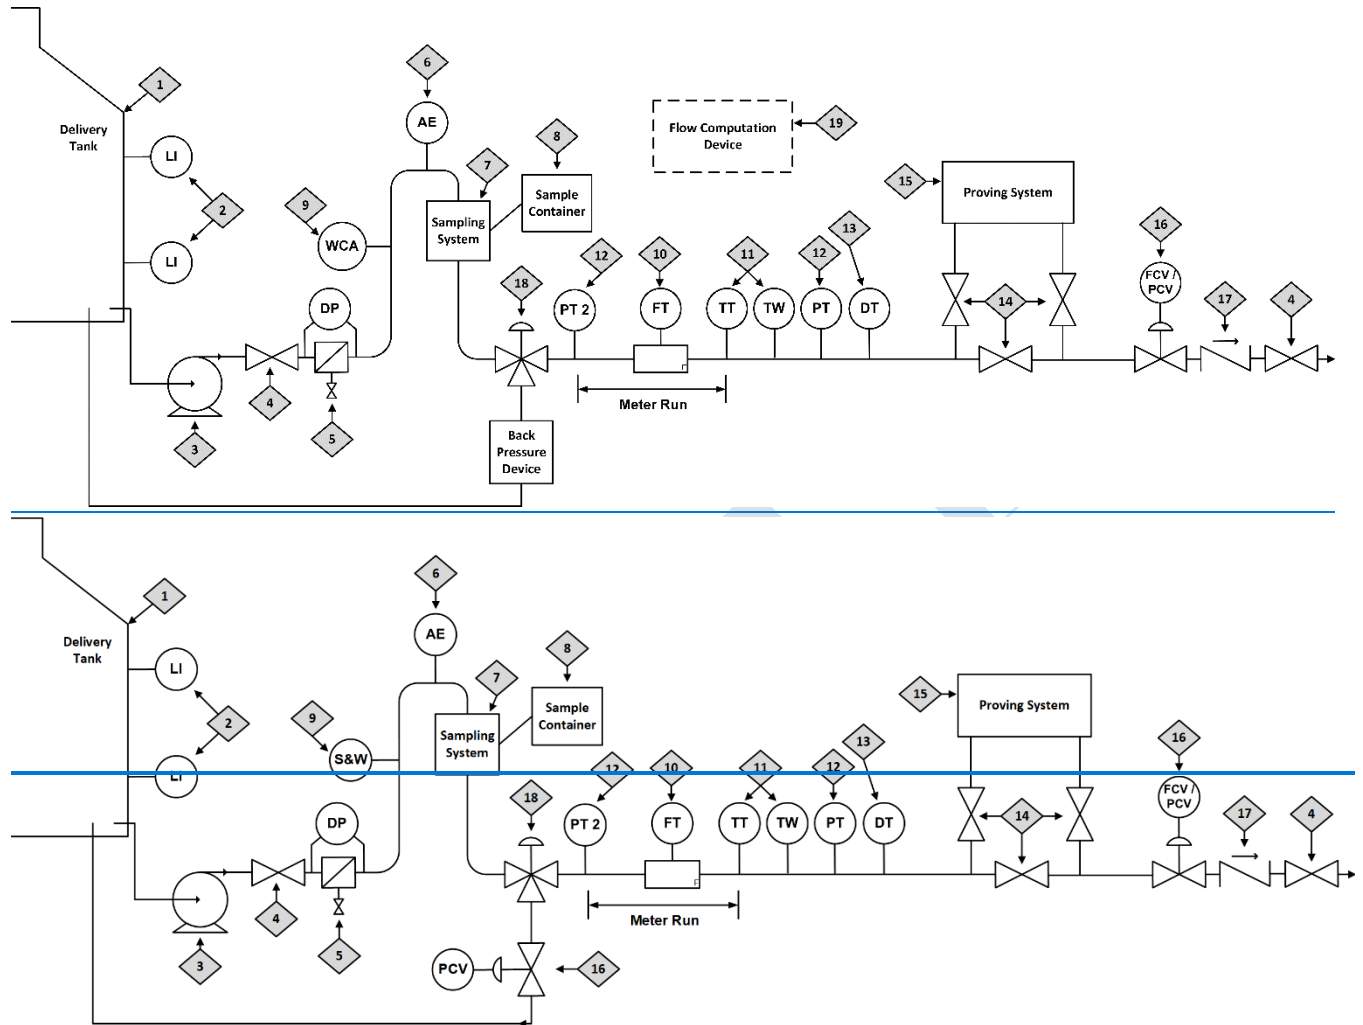


Figure 1 – Typical LACT Metering System

- | | |
|--|------------------------------------|
| 1. Delivery Tank | 10. Custody Transfer Meter |
| 2. Delivery Tank Level Device | 11. Temperature Measurement Device |
| 3. Charge Pump and Motor | 12. Pressure Measurement Device |
| 4. Inlet / Outlet Isolation Valves | 13. Density Meter |
| 5. Strainer | 14. Prover Valve Manifold |
| 6. Air Eliminator | 15. Proving System |
| 7. Sampling System | 16. Back Pressure Valve Device |
| 8. Sample Container and Circulation Pump | 17. Check Valve |
| 9. Water Cut Analyzer | 18. Diverter Valve |
| | 18-19. Flow Computation Device |

5 Design and Installation

5.1 General System Design and Installation Considerations

LACT systems encompass a broad range of measurement systems – from a simple, single-meter system which measures a few hundred barrels per day, to a complex, multiple-meter system which measures several hundred thousand barrels per day. LACT systems can have various configurations, depending on flow rate, type of transporting carrier, intermittent or continuous operation, maintenance requirements, contractual and regulatory requirements, method for interruption of non-merchantable oil, redundancy requirements, proving requirements, and prover design.

System components shall be designed to accommodate the full range of expected operating conditions, including flow rate, pressure, temperature, density, viscosity, sediment, and water content ranges. The system shall be designed to operate at a pressure that exceeds the expected equilibrium vapor pressure by an amount sufficient to avoid formation of any vapor. [Air eliminators shall be installed where air or vapor can be introduced into the system.](#)

System components shall be selected or designed to accommodate the full range of expected ambient conditions (e.g., temperature, offshore salt-laden atmosphere, adverse environmental conditions, etc.). Consideration should be given to the effects of these ambient conditions on measurement accuracy and/or access for maintenance. For some applications, it is appropriate to install the LACT system under a shelter or inside a building.

The system shall be designed to accommodate the expected physical properties of the fluid and any potential for wax/paraffin appearance. The system should operate above the fluid's wax appearance temperature and the design can require the use of heat tracing and/or insulation to ensure this temperature is maintained.

The system should be able to detect failed components to minimize mismeasurement or hazardous operating conditions. Additionally, it can be necessary to provide a means to control flow rates, periods of flow, and quantities of oil delivered into the transporting carrier's system.

The design of the system shall provide a means for detecting leakage throughout the system, for example, double-block and bleed valves or valve assemblies, sight glasses, flow or level indication, and/or pressure instruments. The system design shall include means to prevent or detect unintended addition or removal of fluid that could adversely impact the measured quantity or quality delivered to the transporting carrier's system. The system shall also be designed or equipped to prevent unintended reverse flow of liquid through the measuring devices.

All components of the system that require periodic inspection, verification, or calibration should be safely accessible.

An example LACT system data sheet is provided in Annex A to aid in system design or assessment.

5.1.1 Handling of Non-Merchantable Oil

LACT systems shall include a means of determining whether the flowing product entering a transporting carrier's system is merchantable oil. The system shall be designed such that when non-merchantable oil is detected the agreed upon action for handling of the non-merchantable oil is taken.

Depending on the installation, handling of non-merchantable oil can be accomplished by:

This document is not an API Standard; it is under consideration within an API technical committee but has not received all approvals required to become an API Standard. It shall not be reproduced or circulated or quoted, in whole or in part, outside of API committee activities except with the approval of the Chairman of the committee having jurisdiction and staff of the API Standards Dept. Copyright API. All rights reserved.

- A) ~~use of a~~ divert valve(s) that recycles non-merchantable oil back to storage or a wet oil system
- B) system generated command to stop the charge pump motor
- C) system generated command to close the LACT delivery valve or other valve to isolate from the transporting carrier's system
- D) continue delivery of non-merchantable oil to transporting carrier's system with notification to the transporting carrier
- E) a combination of the above

5.1.2 High Viscosity Applications

Viscous hydrocarbons present a higher resistance to flow and can require special treatment or equipment to promote accurate measurement. It is more difficult to separate entrained air or vapor from viscous liquids. As viscosity increases, the retention time required for separating entrained gas from the liquid increases. Special meter modifications can be required and the meter manufacturer should be consulted.

It is important that the temperature / viscosity of the liquid be maintained within a range which does not influence meter accuracy beyond performance requirements. Variations in temperature / viscosity can necessitate viscosity indexing, Reynolds Number indexing, and/or more frequent proving and/or the use of meter factor linearization, refer to ~~encc~~ API MPMS Chapter 21.2. Many viscous liquids can be heated to lower the viscosity and facilitate handling. Special consideration should be taken for meters, auxiliary equipment, and fittings to accommodate or mitigate the effects of high temperatures during handling of heated liquids; for example, the following should be considered:

- A) System equipment can be subject to temperature limitations.
- B) System insulation maintains temperature control and contributes to personnel safety; however, insulation can limit access to equipment.
- C) Care should be taken to ensure the product remains in the liquid phase.

For services in which the product requires heating and the line to the LACT is required to be liquid full between movements, it may be advisable to circulate the liquid through the LACT system and a return line back to storage. Heating and/or insulating of any liquid full piping (e.g., return line) may also be advisable. The return line should tee off as close to the meter inlet as possible. In some applications, it can be necessary to circulate the liquid through the entire system, including the meter; however, appropriate steps shall be taken to ensure the measurement ticket accurately reflects the quantity delivered to the transporting carrier's system. An automatic method of controlling circulation and meter registration is recommended in this type of installation. Valves should be located in the return line to permit control of flow.

5.1.3 Redundancy

Redundant meters, meter runs, and other system components should be considered when shut down for maintenance or repair is not practical.

Redundancy should be considered for the following metering system components:

- A) Flow Meters (and flow conditioning, where required)
- B) Strainers
- C) Valves
- D) Instrumentation
- E) Water Cut Analyzers

This document is not an API Standard; it is under consideration within an API technical committee but has not received all approvals required to become an API Standard. It shall not be reproduced or circulated or quoted, in whole or in part, outside of API committee activities except with the approval of the Chairman of the committee having jurisdiction and staff of the API Standards Dept. Copyright API. All rights reserved.

- F) Density Meters
- G) Sampling System Components (e.g., Sample Probes, Receivers, Actuators)
- H) Flow Computers and Control Panel Components

Redundant metering systems typically include $n+1$ parallel meters, where n is the required number of meters to accommodate the maximum metering system instantaneous flow rate. Common $n+1$ design configurations include 3 X 50% metering (i.e., two flowing meters + one spare meter) and 2 X 100% metering (i.e., one flowing meter + one spare meter).

5.1.4 Bidirectional Metering

In some cases, LACT measurement applications require bidirectional metering capability, such as an offshore “buyback” metering configuration during which liquid hydrocarbon is temporarily transferred from a transportation system to a production facility. When bidirectional measurement is required, it is recommended to use a separate meter run [and sampling system](#) for each direction (e.g., from a production facility or to a production facility). Alternatively, piping with appropriate valving can be used to reverse facility flow direction through a unidirectional meter run. [Bidirectional metering shall meet quantity and quality determination requirements of this Standard under all operating scenarios.](#) -The use of bidirectional meter runs on LACT systems is discouraged.

5.2 Flow Meter

The purpose of the custody transfer meter is to accurately measure the quantity of liquid hydrocarbons being transferred between parties. LACT meters shall be designed in accordance with API *MPMS* Chapter 5.

LACT meter types should be selected based on compatibility with fluid properties and design ranges for the application, including ranges of instantaneous flow rate, density, viscosity, temperature, pressure, and water content. It is essential to size LACT meters for the instantaneous flow rate range of an application rather than production volume of a system that has intermittent rather than continuous flow. Meter linearity over the operating range of the specific application should be considered during meter selection. See API *MPMS* ~~Ch-Chapter~~ 5.1^[3] for additional information related to meter linearity.

The four technologies listed below are considered acceptable for use in LACT metering systems. Additional meter types can be suitable for LACT custody transfer applications if there is a published API *MPMS* Chapter 5 standard specific to the meter type.

- Displacement meter
- Turbine meter
- Coriolis meter
- Ultrasonic meter - multipath wetted transducer type

Displacement meters measure flow directly by separating the flowing liquid stream into discrete segments and counting the segments or meter revolutions. Displacement meters do not require conditioned flow. Various displacement meter accessories are available, such as flow transmitters, local volume totalizers, mechanical output drives used for portable meter proving, and meter output adjusters to correct for meter error or liquid properties. The number of mechanical accessory devices should be limited as much as practical to minimize additional mechanical load and meter wear. Some displacement meters can be mounted horizontally or vertically. The meter manufacturer should be consulted for proper orientation to prevent issues related to bearing load and wear. When electronic flow registration is used, displacement

This document is not an API Standard; it is under consideration within an API technical committee but has not received all approvals required to become an API Standard. It shall not be reproduced or circulated or quoted, in whole or in part, outside of API committee activities except with the approval of the Chairman of the committee having jurisdiction and staff of the API Standards Dept. Copyright API. All rights reserved.

meter output signals are typically amplified and transmitted to a flow computation device. See API *MPMS* [Ch-Chapter 5.2^{\[4\]}](#) for additional information related to displacement meters.

Turbine meters infer flow by sensing the rotation of blades or a blade assembly in the flowing liquid stream. Turbine meters may be mounted either vertically or horizontally; however, downward flow through a vertically mounted meter is not recommended because the rotor will ride continuously on the downstream bearing resulting in hydraulic imbalance and associated meter wear or error. The meter manufacturer should be consulted for proper orientation to prevent issues related to bearing load and wear. Turbine meters require conditioned flow and turbine meter runs are typically fitted with mechanical flow conditioners. Turbine meter output signals are typically amplified and transmitted to a flow computation device. See API *MPMS* [Ch-Chapter 5.3^{\[5\]}](#) for additional information related to turbine meters.

Coriolis meters process flow by measuring the Coriolis force caused by liquid stream flow through one or more meter flow tubes. Coriolis meters ~~have primary~~ [provide](#) mass flow and liquid density measurements, from which volumetric flow ~~rate~~ can also be derived. Coriolis meter [outputs are programmable and outputs](#) can be configured [as to represent volumetric volume](#) or mass ~~outputs~~. Unless specifically required by the manufacturer, Coriolis meters do not require conditioned flow. The meter manufacturer should be consulted for preferred orientation. Coriolis meters have available meter and process diagnostics that can be accessed with a digital communication connection. See API *MPMS* [Ch-Chapter 5.6^{\[6\]}](#) for additional information related to Coriolis meters.

Multipath ultrasonic meters process flow by measuring ultrasonic signals transmitted through the liquid flowing stream. Ultrasonic meters require conditioned flow and ultrasonic meter runs are typically fitted with mechanical flow conditioners. Ultrasonic meters have available meter and process diagnostics that can be accessed with a digital communication connection. See API *MPMS* [Ch-Chapter 5.8^{\[7\]}](#) for additional information related to ultrasonic meters.

All meter types have varying sensitivities to fluid properties such as density, viscosity, and solids content. Meter manufacturers should be consulted to ensure compatibility with fluid properties and operating conditions.

LACT meter output resolution varies by meter type and design. In some cases, the raw meter output resolution provides fewer pulses than required by meter proving requirements as specified in API *MPMS* [Ch-Chapter 4.8](#) and flow computation devices with pulse interpolation functionality are used to meet resolution requirements for meter proving. See API *MPMS* [Ch-Chapter 4.6^{\[2\]}](#) for additional information on pulse interpolation.

LACT meter output units typically correspond to the units specified in applicable contracts or regulation (i.e., volume-based meter outputs for volume-based transactions and mass-based meter outputs for mass-based transactions).

For meter types that require periodic meter zero verifications or adjustments, LACT metering systems should include the appropriate double-block-and-bleed valves or valve manifolds to facilitate isolation of a liquid-filled flow meter and verification of a no-flow condition.

Flow meters capable of digital communications often have additional information or diagnostics available via the digital interface that can provide valuable information. These meters should be installed such that meter information and diagnostics are readily accessible.

This document is not an API Standard; it is under consideration within an API technical committee but has not received all approvals required to become an API Standard. It shall not be reproduced or circulated or quoted, in whole or in part, outside of API committee activities except with the approval of the Chairman of the committee having jurisdiction and staff of the API Standards Dept. Copyright API. All rights reserved.

5.3 Proving System

The purpose of the proving system is to provide a known quantity for comparison with a meter's indicated quantity in order to establish a meter factor. The proving system may be either portable or stationary and shall be designed in accordance with API *MPMS* Chapter 4.

~~The prover type and size to be chosen for a particular application depend primarily on fluid properties, process conditions, and meter type. Company measurement policies, expected frequency of use, economics, regulatory requirements, and contractual agreement between parties also affect prover selection. The type of prover to be chosen depends on company measurement policies, expected frequency of use, meter type, economics, regulatory requirements, and contractual agreements between parties.~~

5.3.1 Prover Valve Manifold

The purpose of the prover valve manifold is to direct flow to either the downstream pipeline or to the prover. The prover valve manifold shall be designed in accordance with API *MPMS* Chapter 4.

5.4 Quality Determination

5.4.1 Sampling System

The purpose of a sampler is to extract a representative sample for quality determination. The system shall have a means to perform automatic sampling in accordance with API *MPMS* Chapter 8.2. When a manual sample point is to be used for ~~custody transfer~~determining density for proving and/or quality verification it shall be in accordance with API *MPMS* Chapter 8.1. The sample extractor location shall provide a homogeneous sample of the currently flowing fluid by use of flow conditioning or other means. ~~Both the manual and automatic sample locations shall have a means to condition the flow prior to extracting the sample per API *MPMS* Chapter 8.2.~~ In addition to API *MPMS* Chapter 8 design requirements, the following sections address individual Sampling System components design recommendations to meet equipment design requirements for unattended custody transfer of liquid hydrocarbons.

5.4.1.1 Stream Conditioning

A static mixer is recommended to ensure the flowing product is adequately and evenly dispersed to ensure a homogenous sample at the sample extraction point. Alternatively, there are multiple types of stream conditioning methods that may be considered depending on each specific site's flowing conditions.

To facilitate sample system performance testing, installation of a water injection test connection upstream of the sampling system and stream conditioning should be considered. Water injection test connections should be located downstream of devices that would accumulate injected water. Water injection test connections should be sized to match the injection meter size required for the maximum expected water flow through the sampling system (i.e., product-based on max water content and maximum flow rate). Refer to API *MPMS* Chapter 8.2 for additional details.

This document is not an API Standard; it is under consideration within an API technical committee but has not received all approvals required to become an API Standard. It shall not be reproduced or circulated or quoted, in whole or in part, outside of API committee activities except with the approval of the Chairman of the committee having jurisdiction and staff of the API Standards Dept. Copyright API. All rights reserved.

5.4.1.2 Sample Extractor & Controller

The purpose of the extractor or sample probe and controller is to grab samples that are proportional to flow. The sample extractor should be an isokinetic type, which helps to ensure the extracted sample is more representative of the flowing stream. Sample extractors should be paced proportional to flow based as measured by~~on the volume measured by the~~ flow meter(s).

Manual sample probes are used to take spot samples in operation and during sampling system performance testing. A manual sample probe should be installed within the same homogenous piping zone as the automatic sample extractor. See API *MPMS* Chapter 8.1 for additional manual sample probe details.

Sample extractors and manual sample probes should be externally marked to indicate flow direction for verification of installation orientation.

5.4.1.3 Sample Line

The purpose of the sample delivery line or tubing from the sample extractor to the sample container is to consistently deliver the sample into the container while maintaining the sample integrity and composition as extracted by the sample probe.

The sample line diameter should be large enough to prevent paraffin and other waxing materials from obstructing the sample line. A minimum nominal diameter of 3/8" is recommended. Sample delivery lines should-shall continually slope down to the container entry point without any dead legs. A sample delivery line slope of at least 1" per foot is recommended; therefore, sample container systems should be located as close as practical to sample extractors. Sample delivery lines should contain only the necessary valves and fittings to minimize liquid traps. Valves and fittings should be sized as close as practical to internal diameter of the sample delivery line. Heat trace and insulation can be required in some applications to ensure adequate flow. Reference API *MPMS* Chapter 8.2 for more information about minimizing contamination when using multiple sample containers.

5.4.1.4 Sample Container System

The purpose of the sample container system is to collect the extracted samples from the sampler and maintain sample integrity without altering the collected sample composition. The sample container and associated equipment shall be designed and installed in accordance with API *MPMS* Chapter 8.2 and to be compatible with liquid hydrocarbons. In locations with extreme weather conditions, the sample container system should be protected from adverse ambient conditions that can affect the physical properties and chemical composition of the sample.

The sample container should be equipped with a pressure safety device, high level detection, level indicator, combination positive pressure / vacuum gauge, and in the case of stationary sample containers, a mixing device. Consider a mechanical device to prevent over filling the container as a backup to the primary overfill protection. Container and over pressure protection shall be chosen to maintain the integrity of the sampled product (e.g., loss of light ends). Sample container design should shall facilitate proper mixing of the sample to ensure a homogenous sample and should-shall be tested according to API *MPMS* Chapter 8.3^[8].

Multiple sample containers and separate sample lines should be considered if sample segregation is needed or if operationally necessary.

This document is not an API Standard; it is under consideration within an API technical committee but has not received all approvals required to become an API Standard. It shall not be reproduced or circulated or quoted, in whole or in part, outside of API committee activities except with the approval of the Chairman of the committee having jurisdiction and staff of the API Standards Dept. Copyright API. All rights reserved.

5.4.1.5 Circulation Pump

The purpose of the circulation pump is to mix the full content of the container for quality determination. For locations with stationary sample containers, it is recommended that each sample container have its own pump.

5.4.2 Water Cut Analyzer

The purpose of the water cut analyzer (WCA) is to monitor the water content of the liquid hydrocarbon. It may also be used to ensure the water content is within contractual limits. Refer to API TR 2570^[44] for guidance on design and installation of water cut analyzer.

Where a divert mechanism is used for returning non-merchantable oil, the WCA shall be installed upstream of the divert mechanism.

Selection of the WCA should consider if there is a potential for wax in the product. When wax can be present, the manufacturer should be consulted to determine if construction or internal coatings can be adopted to inhibit wax buildup.

5.4.3 Density Meter

The purpose of the density meter is to provide an accurate [density determination of the flowing density fluid](#). A method for verification of the density meter should be included in the LACT design. This typically involves the use of a hydrometer or a master density meter. A pycnometer can also be used, but it can be difficult to clean the pycnometer due to the nature of the product. The installation, use, and verification of online density meters shall be done in accordance with API MPMS ~~Ch-~~[Chapter 9.4](#).

5.4.4 Online Quality Monitor / Analyzer

Other quality monitoring instruments such as organic chlorides, H₂S, vapor pressure monitors, [etc., and others](#) may be installed to measure specific quality requirements of a system. Such instruments should be designed and installed such that they do not interfere with the meter or other measurement devices. These types of quality monitoring equipment are not within the scope of this document.

5.4.5 Slip Stream Sample Loop Installations

If a slip stream sample loop (fast loop) is being used for devices described in sections 6.4.1 through 6.4.4 the design shall ensure that the product is returned without bypassing the metering section, divert mechanism, sampling system, or proving connections. If the slip stream sample loop is used for multiple devices, the design shall ensure devices do not interfere with each other. The manual sampling point may be included in the fast loop/slip stream.

5.5 Secondary Measurement Devices

5.5.1 Pressure Measurement Devices

The purpose of pressure measurement devices is to accurately determine the pressure of the fluid passing through the meter and prover. Pressure measurement devices shall be installed in accordance with API MPMS ~~Ch-~~[Chapter 4](#), ~~Ch-~~[Chapter 5](#), and ~~Ch-~~[Chapter 6.1A](#). The pressure measurement device for the meter should be located as close as practical downstream of the meter. For meters that are affected by variations in flow profile, pressure measurement devices should be outside of any stream

This document is not an API Standard; it is under consideration within an API technical committee but has not received all approvals required to become an API Standard. It shall not be reproduced or circulated or quoted, in whole or in part, outside of API committee activities except with the approval of the Chairman of the committee having jurisdiction and staff of the API Standards Dept. Copyright API. All rights reserved.

conditioning meter run piping-length requirements. Pressure measurement device installation shall allow for verification and calibration of the pressure measurement device in accordance with API *MPMS* ~~Ch-Chapter~~ 21.2.

5.5.2 Temperature Measurement Devices & Test Thermowells

The purpose of temperature measurement devices is to accurately determine the temperature of the fluid passing through the meter and prover. Temperature measurement devices shall be installed in accordance with API *MPMS* ~~Ch-Chapter~~ 4, ~~Ch-Chapter~~ 5, ~~Ch-Chapter~~ 6.1A, and ~~Ch-Chapter~~ 7.4. A test thermowell should be installed to allow for verification and calibration of the temperature measurement device. The temperature measurement device and the test thermowell for the meter should be located as close as practical downstream of the meter. ~~For meters that are affected by variations in flow profile, temperature measurement devices should be but~~ outside of any-stream conditioning meter run piping-length requirements. Normal practice is to install thermowells downstream of the meter.

5.6 Additional LACT System Components

5.6.1 Delivery Tank

The purpose of the delivery tank is to provide sufficiently stable merchantable oil with enough static head to provide adequate flow and NPSH to feed the LACT charge pump(s). The delivery tank shall be sized to provide sufficient inventory to last the duration of the meter proving. The suction line shall be designed to prevent vortex generation and should not inadvertently introduce material (e.g., sediment, water, etc.) into the flow stream that could~~may~~have settled into the bottom of the tank. The purpose of the delivery tank is to provide merchantable oil that is stabilized with sufficient static head pressure to provide sufficient flow or enough NPSH to feed the LACT charge pump(s). The delivery tank shall be adequately sized to provide sufficient volume during the meter proving. The suction line shall be designed to prevent vortex generation and shall not introduce material (e.g., sediment, water, etc.) into the flow stream that can settle into the bottom of the tank. Level indicator devices on the delivery tank may be used to provide the start and stop commands to the charge pump.

5.6.2 Pumps and Motors

API Standards 610^[40], 674^[44], and 676^[42] should be consulted for additional guidance regarding pump design and characteristics. These same API standards also provide guidance on drivers, couplings, seals, baseplates, and other auxiliaries. API RP 686^[43] provides industry best practice on receiving, storage/preservation, foundations/grouting, equipment installation, and commissioning for almost any equipment on the LACT unit, but most particularly for the rotating equipment. Pressure and hydraulic analysis should be performed to ensure sufficient pressure and flow are provided for pumps.

Particular attention should be observed when the charge and injection pumps have motors equipped with Variable Frequency Drives (VFDs). Some meter technologies can be affected by the VFD operating frequencies. Consult with the meter manufacturer about any special considerations when operating near VFDs. Variations in flow inherent to the use of VFDs can also affect meter performance, especially during proving.

This document is not an API Standard; it is under consideration within an API technical committee but has not received all approvals required to become an API Standard. It shall not be reproduced or circulated or quoted, in whole or in part, outside of API committee activities except with the approval of the Chairman of the committee having jurisdiction and staff of the API Standards Dept. Copyright API. All rights reserved.

5.6.2.1 Charge Pump and Motor

LACT systems shall be designed to operate at flow rates within the meter manufacturer's recommended range. If NPSHA could be insufficient to achieve this flow rate, a charge pump shall be included in the LACT system design.

Charge pumps ~~shall be selected such that they do not adversely affect measurement performance. that do not induce pressure pulsations or flow rate surges shall be selected. Centrifugal pumps are preferred that do not introduce pressure pulsations or flow rate surges are recommended, but non-reciprocating, positive displacement pumps may be considered. Reciprocating positive displacement pumps and progressing cavity pumps are not recommended for use as the charge pump. Configuration should be self-purging to avoid gas lock.~~ When a positive displacement pump is specified, a pressure relief valve shall be provided on the pump discharge to either return oil to storage or to the pump suction. Charge pump sizing should be carefully reviewed when integrating the pump on the LACT skid. To prevent charge pump cavitation, system piping and valving should be designed to maintain adequate NPSHA. In addition to monitoring meter flow rates, a dedicated flow switch could be installed to protect LACT system pumps from adverse operating conditions.

5.6.2.2 Injection Pump and Motor

A pipeline injection pump could be necessary for delivery of product from the LACT system to the transporting carrier. The pipeline injection pump may be mounted on the LACT system skid (depending on the size of the pump and motor).

Pipeline injection pump takeaway capacity should not exceed the LACT measurement system charge pump supply and enough piping volume should be provided in between the two pumps to prevent unstable sales meter back pressure from occurring due to pump interaction.

When the charge pump provides sufficient NPSHA for the pipeline injection pump and also maintains ~~maintains~~ sufficient ~~back~~ pressure on the system, during both normal operation and proving, the use of a back pressure control valve ~~can~~ might ~~not~~ be ~~omitted~~ necessary.

5.6.3 Strainer

Strainers ~~are recommended~~ should be used upstream of the charge pump and/or meter to remove contaminants from the flow stream that can cause fouling or damage to downstream system components. The strainer should be designed taking into consideration the pressure drop at maximum flow rate and maximum viscosity. Strainer baskets should be designed to handle expected worst case differential pressure considering maximum flowrate with dirty or partially obstructed basket.

A pressure drop between 15 kPa and 35 kPa (2 psi to 5 psi) is commonly used for design considerations. To help minimize pressure drop, the strainer body should be at least one nominal line size larger than the flow meter and/or associated piping.

Ensure the design of the strainer is suitable for the type of metering technology selected (consult meter manufacturer). The strainer basket perforations and/or mesh size should be sized in accordance with the meter and prover manufacturer's recommendations. A means should be provided to ensure the strainer basket is held in position for meters that are influenced by flow profile disturbances, refer to API MPMS Chapter 5 and API TR 2578⁽⁴⁶⁾ for additional details.

~~Strainer baskets should be designed to handle expected worst case differential pressure considering maximum flowrate with dirty or partially obstructed basket.~~

This document is not an API Standard; it is under consideration within an API technical committee but has not received all approvals required to become an API Standard. It shall not be reproduced or circulated or quoted, in whole or in part, outside of API committee activities except with the approval of the Chairman of the committee having jurisdiction and staff of the API Standards Dept. Copyright API. All rights reserved.

A means of monitoring the differential pressure across the strainer is recommended. Increased differential pressure ~~could~~ can indicate that the strainer requires cleaning and ~~could~~ potentially cause a flow profile distortion that could affect measurement performance. Additionally, a basket failure can be destructive to measurement devices and downstream equipment. Possible methods of meeting this recommendation are two independent pressure devices, one located on each side of the strainer, or a single differential pressure device installed across the strainer.

5.6.4 Air Eliminator

The purpose of an air eliminator is to remove gases (e.g., air, ~~gas~~, vapor) from the flowing liquid before entering the sampling, metering, and proving systems. If the production site design or mode of operation is such that air will not enter the LACT system, an air eliminator is not required.

The type and size of air eliminator equipment is dependent on the expected amount of air to be encountered. These can range from a liquid / vapor separator vessel to simple air release head(s) installed on a strainer lid or high point. When required, air eliminators shall be installed downstream of the charge pump and upstream of the meter, proving system, and sampling. Refer to API MPMS ~~Ch.~~Chapter 6.1A for additional information on air eliminators.

Conventional air elimination devices are intended to vent to atmospheric pressure. Integrating this with a closed drain system can inadvertently apply back pressure to the device such that it does not function as originally intended. Soft seated check valves are commonly installed on the air eliminator discharge before integrating with a closed drain system to help prevent backflow past the air eliminator. The manufacturer of the device should be consulted to understand additional measures (e.g., pressure alarm, liquid sensing element, sight glass) to be taken into account during the design of the system.

Running the outlet of the air eliminator to the sump can cause issues if the valve becomes stuck open. Means to monitor and drain the sump before spills occur should be considered. Running the outlet of the air eliminator directly to a sump tank could also accomplish this, but care should be taken to ensure additional back pressure is not added to the air eliminator.

5.6.5 Valves

5.6.5.1 Back Pressure Valve

The purpose of the back pressure valve is to maintain the minimum required ~~positive liquid head pressure~~ or back pressure on the system. Depending on the type of valve used for maintaining back pressure, this valve can also provide additional functionality for controlling flow and enable adjustment to reproduce operating conditions during proving. The back pressure valve shall be located downstream of the meter, prover, and sampling system. Refer to API MPMS ~~Ch.~~Chapter 6.1A for additional information on meter required back pressure. Meter and equipment manufacturers should be consulted to determine the required minimum back pressure.

~~Depending on the type of valve used for maintaining back pressure, this valve could also be capable of providing additional functionality for controlling flow.~~ When a single valve is expected to provide back pressure control and flow control, the valve should be controlled based on flow with a back pressure override, such that the required minimum back pressure is maintained.

Other means of maintaining back pressure are commonly used, such as orifice plates or other restriction devices. Such devices, when installed in place of back pressure valves, shall meet the same functional requirements.

This document is not an API Standard; it is under consideration within an API technical committee but has not received all approvals required to become an API Standard. It shall not be reproduced or circulated or quoted, in whole or in part, outside of API committee activities except with the approval of the Chairman of the committee having jurisdiction and staff of the API Standards Dept. Copyright API. All rights reserved.

5.6.5.2 Product Divert Valve(s)

Product divert valve(s) are often required by contract or regulation to prevent the flow of non-merchantable oil into the transporting carrier's system. Divert valve(s) typically route non-merchantable oil to treatment facilities, an alternate location, or back to [the](#) source. Product divert control can be implemented using a single 2-position 3-way valve, or two 2-position 2-way valves.

When divert systems are required, the divert system:

- a) shall move to the divert position when the system detects non-merchantable oil. Note that any timing delays (e.g., prior to transitioning from metering mode to divert mode after detection of non-merchantable oil, prior to transitioning from divert mode to metering mode upon pump startup or detection of merchantable product) should be agreed upon by the relevant parties.
- b) shall move to the divert position upon loss of pneumatic supply or electrical power, or upon loss of control signal
- c) should move to the divert position when the pumps are shut down

Product divert valve(s) should be installed upstream of the meter [and sampler](#). Where the product divert valve(s) are installed downstream of the meter [and/or sampler](#), ~~steps shall be taken to ensure that~~ the measurement ticket [shall](#) accurately reflect the quantity delivered to the transporting carrier's system. [When flow is being diverted downstream of the meter and/or sampler, special consideration shall be given to ensure that flow totalization, flow weighted averaging, and sampling are suspended.](#)

A recirculation pump could be required to provide sufficient pressure for delivery to the divert destination (e.g., wet oil storage). Installation is dependent on the hydraulic requirements of the system.

The use of a back pressure valve, orifice, or [other means/other mechanism](#) could be required to ensure back pressure on the divert line is [relatively equal/comparable](#) to the sales line back pressure to minimize hydraulic shock when operating the divert valve.

5.6.5.3 Check Valve

The purpose of check valve(s) in a LACT system is to prevent metered fluid from flowing backward through the system. Check valve(s) should be installed on the LACT system unless backward flow is prevented by other means in all operating scenarios. The use of a check valve on the divert line could also be required.

5.6.5.4 Inlet / Outlet Isolation Valves

For maintenance purposes, isolation valves should be installed upstream and downstream of the LACT system or meter runs.

Consideration should be given to the method by which non-merchantable oil will be isolated. If planning to isolate the delivery to the transporting carrier using these valves, then the valve type, actuation, and time of closure should be considered.

5.6.6 Electrical Panels

5.6.6.1 Power Panel

The purpose of the power panel is to provide power to the major equipment on the LACT system. This includes all pipeline motor-operated valves, charge pump, injection pump, recirculation pump, diverter valve, etc. [Devices associated with reducing current and controlling pump speed, such as soft starts and variable frequency drives, should be located in this panel.](#)

This document is not an API Standard; it is under consideration within an API technical committee but has not received all approvals required to become an API Standard. It shall not be reproduced or circulated or quoted, in whole or in part, outside of API committee activities except with the approval of the Chairman of the committee having jurisdiction and staff of the API Standards Dept. Copyright API. All rights reserved.

~~The power panel should not power the measuring equipment such as the meter, instrumentation, sampler, etc. Measuring equipment (meter, instrumentation, sampler) should be powered by a separate source to eliminate influences from induced voltage spikes or drops, power surges, and electromagnetic interference.~~

~~Devices associated with reducing current and controlling pump speed, such as soft starts and variable frequency drives, should be located in this panel.~~

5.6.6.2 Measurement and Control Panel(s)

The automation equipment that controls and monitors the LACT system are contained in the measurement and control panel(s). All wiring from devices that can affect the net quantity determination of the flowing stream should be run to the measurement and control panel(s). This should include, but not be limited to, wiring from the flow meters, meter and prover temperature devices, meter and prover pressure devices, ~~densitometers~~[density meter](#), water cut analyzer, samplers, prover detector switches, flow computer, flow control or back pressure control valves, relief or vent detection devices and alarms.

~~In some locations, w~~Wiring for communications with remote supervisory and control systems ~~are~~[can be](#) incorporated into the measurement and control panel(s), allowing for offsite monitoring, data logging, and control.

Instrumentation and communication wiring shall include shielding where required by electrical code or recommended by device manufacturers. Pulse, frequency, and analog signal types are far more susceptible to noise that could potentially create measurement errors. Therefore, wiring for these signals requires proper shielding.

The measurement and control panel(s) often contain the local user interface to the process. Panel(s) may also include devices to meet requirements for alarming, on-site data logging, etc.

5.7 Flow Computation and Records

Calculations used to produce a measurement ticket are selected based on the measured liquid fluid properties and whether volumetric or mass measurement techniques are being applied. Calculation requirements are outlined in API *MPMS* ~~Ch.~~[Chapter](#) 21.2 (volume), API *MPMS* ~~Ch.~~[Chapter](#) 21.2, Addendum 1, Section 2 (mass), and GPA 8182^[23]. [Appropriate steps shall be taken to ensure the measurement ticket accurately reflects the quantity delivered to the transporting carrier's system](#)

Provisions ~~should~~[shall](#) be included to capture and retain an audit trail, which consists of the documents and records necessary to allow the measurement ticket to be audited (refer to API *MPMS* ~~Ch.~~[Chapter](#) 21.2). Elements of the audit trail can include:

- Configuration logs
- Event and alarm logs
- Pressure, temperature, and density verification records
- Prover calibration certificate
- Calibration records (where applicable)
- Calibration standard certificates

This document is not an API Standard; it is under consideration within an API technical committee but has not received all approvals required to become an API Standard. It shall not be reproduced or circulated or quoted, in whole or in part, outside of API committee activities except with the approval of the Chairman of the committee having jurisdiction and staff of the API Standards Dept. Copyright API. All rights reserved.

6 Operations and Maintenance Considerations

6.1 Quantity Calculation

Users should consider regular verification of measurement ticket calculations in accordance with API *MPMS* Chapter 12^[9] and GPA 8182^[23]. ~~These calculation verifications are performed to confirm that changes to flow computer or ticket calculation configuration(s) produce correct results, and are sometimes repeated periodically. These verifications are typically performed annually and after changes to the configuration.~~

6.2 Quality Determination

Hydrocarbon quality should be tested to ensure properties, such as density, S&W, H₂S, sulfur, and vapor pressure, are within limits as defined by contractual or regulatory requirements. Representative samples should be tested in accordance with API and ASTM^[16-19] standards to determine hydrocarbon properties.

When sample results are used in quantity transaction calculations, representative samples shall be tested in accordance with an API *MPMS* Chapter 9, API *MPMS* Chapter 10, or applicable ASTM^[16-19] standard.

6.3 Custody Transfer Meters

LACT meters should be periodically proved in accordance with API *MPMS* ~~Ch-Chapter~~ 4.5 and API *MPMS* ~~Ch-Chapter~~ 4.8. Meter provers used for establishing LACT meter factors can be displacement provers, tank provers, or master meter provers that are designed in accordance with API *MPMS* ~~Ch-Chapter~~ 4.2, API *MPMS* ~~Ch-Chapter~~ 4.4, and API *MPMS* ~~Ch-Chapter~~ 4.5, respectively. LACT meter proving should be performed in accordance with a written meter proving procedure. If metering systems do not operate at a relatively constant flow rate (e.g., ± 10 percent) and meters are not re-proved on rate change, a periodic linearity check (e.g., annual) should be performed to determine if a meter factor linearization method (refer to API *MPMS* ~~Ch-Chapter~~ 21.2) needs to be adopted in order to meet contractual or regulatory requirements. During this linearity check, flow rate control should be used at the time of meter proving to ensure proving can be performed over the flow rate range.

~~NOTE—See Annex B for determining normal operating conditions.~~

Meter factor control charts should be maintained for LACT meters. Control charts should indicate meter factors and associated meter control limits. [Refer to API *MPMS* ~~Ch-Chapter~~ 13.2 for additional information.](#)

For LACT systems without redundant or online spare metering, availability of spare meters at or near the site should be considered to minimize metering system down time in the event of a meter failure or performance outside of tolerance.

Refer to the appropriate API *MPMS* Chapter 5 standard for additional guidance related to the operation and maintenance of a specific meter type.

6.4 Strainers

A maintenance program should be followed for inspection and cleaning of strainer baskets.

If a means of monitoring differential pressure is provided, the pressure across the strainer during flowing periods should be monitored regularly. High differential pressure is an indication that the basket contains

This document is not an API Standard; it is under consideration within an API technical committee but has not received all approvals required to become an API Standard. It shall not be reproduced or circulated or quoted, in whole or in part, outside of API committee activities except with the approval of the Chairman of the committee having jurisdiction and staff of the API Standards Dept. Copyright API. All rights reserved.

debris and should be cleaned. Zero or abnormally low differential pressure can be an indication that the basket is ruptured, and the strainer is not providing adequate protection for downstream equipment.

6.5 Valves

All valves that can impact measured quantities shall maintain a leak tight seal when closed. Seal integrity should be verified periodically.

6.6 Provers

Refer to API *MPMS* Chapter 4.8 for operation and maintenance requirements for provers.

6.7 Sampling Systems

Refer to API *MPMS* Chapter 8.2 for operation and maintenance requirements for sampling systems.

6.8 Density Meters

Refer to API *MPMS* Chapter 9.4 for operation and maintenance requirements; including the determination of density meter factors (DMF), for density meters.

6.9 Temperature and Pressure Devices

The verification or calibration of temperature and pressure measuring devices is necessary to ensure they comply with company, regulatory, and contractual requirements. See API *MPMS* [Ch-Chapter 6.1A](#) for further information.

6.10 Flow Computation Devices

Flow computation device (e.g., flow computer) maintenance programs should include:

- Verification of flow computation device configuration
- Review of audit trail
- Review of event and alarm logs
- Verification and calibration of device analog inputs
- Verification of pulse input channel

Refer to API *MPMS* [Ch-Chapter 21.2](#) for additional guidance related to flow computation devices.

6.11 Integrity, Auditability, and Security

Refer to API *MPMS* [Ch-Chapter 6.1A](#) for considerations regarding the integrity, auditability, and security expectations for measurement systems and components.

This document is not an API Standard; it is under consideration within an API technical committee but has not received all approvals required to become an API Standard. It shall not be reproduced or circulated or quoted, in whole or in part, outside of API committee activities except with the approval of the Chairman of the committee having jurisdiction and staff of the API Standards Dept. Copyright API. All rights reserved.

ANNEX A (INFORMATIVE) LACT SYSTEM DATA SHEET EXAMPLES¹

LACT System Data Sheet (US Customary Units)

General Information				Site Information					
Company Name:				Available Power:					
Address / Location:				Instrument Air Available: <input type="checkbox"/> Yes <input type="checkbox"/> No					
Contact Person:				Area Classification Required:					
Contact Phone / Email:				Available Footprint:					
Project Name / Number:				Onshore / Offshore: <input type="checkbox"/> Onshore <input type="checkbox"/> Offshore					
Revision:				Other Site Information:					
				Regulation / Jurisdiction:					
Process Conditions and Product Characteristics									
Fluid Description:				Min Nom Max					
Inlet Pressure Available: _____ psig								BPH	
Outlet Pressure Required: _____ psig								psig	
System Design Pressure: _____ psig								°F	
Flange Rating: <input type="checkbox"/> 150 <input type="checkbox"/> 300 <input type="checkbox"/> 600 <input type="checkbox"/> 900 <input type="checkbox"/> 1500				Flow Rate: _____				°F	
Flange Face: <input type="checkbox"/> RF <input type="checkbox"/> RTJ				Pressure: _____				API @ 60°F	
NACE: <input type="checkbox"/> Yes <input type="checkbox"/> No				Temperature: _____				cP	
Wax Appearance Temperature: _____ °F <input type="checkbox"/> N/A				Ambient Temperature: _____				psia @ 100°F	
				Fluid Density: _____					
				Fluid Viscosity: _____					
				Vapor Pressure: _____					
Equipment Requirement									
System Layout: <input type="checkbox"/> N+0 <input type="checkbox"/> N+1 <input type="checkbox"/> Other: _____				Air Eliminator <input type="checkbox"/> Yes <input type="checkbox"/> No					
Meter Type: _____				Type: _____					
Strainer <input type="checkbox"/> Yes <input type="checkbox"/> No				Location(s) for Installation: _____					
Location(s) for Installation: _____				Charge Pump and Motor <input type="checkbox"/> Yes <input type="checkbox"/> No					
Differential Pressure Device: <input type="checkbox"/> Transmitter <input type="checkbox"/> Indicator <input type="checkbox"/> No				Pump Type: _____					
DP Transmitter Type: <input type="checkbox"/> Transmitter Only <input type="checkbox"/> Indicating Transmitter <input type="checkbox"/> N/A				NPSHa: _____ psig					
Isolation Valves				Req'd Discharge Pressure: _____ psig					
Inlet Isolation <input type="checkbox"/> Yes <input type="checkbox"/> No Type: _____				Injection Pump and Motor: <input type="checkbox"/> Yes <input type="checkbox"/> No					
Outlet Isolation <input type="checkbox"/> Yes <input type="checkbox"/> No Type: _____				Pump Type: _____					
Prover Divert <input type="checkbox"/> Yes <input type="checkbox"/> No Type: _____				NPSHa: _____ psig					
Prover Takeoff & Return <input type="checkbox"/> Yes <input type="checkbox"/> No Type: _____				Req'd Discharge Pressure: _____ psig					
3-Way Divert Valve <input type="checkbox"/> Yes <input type="checkbox"/> No Type: _____				Sampling System					
Check Valve - Meter Stream <input type="checkbox"/> Yes <input type="checkbox"/> No Type: _____				Auto Sampler Type: _____					
Check Valve - Divert Line <input type="checkbox"/> Yes <input type="checkbox"/> No Type: _____				Auto Sampler Grab Size: _____ cc					
Valve Operators				Sample Container Type: <input type="checkbox"/> Fixed <input type="checkbox"/> Portable					
Inlet Isolation <input type="checkbox"/> Manual <input type="checkbox"/> Electric <input type="checkbox"/> Other: _____				Sample Container Volume: _____ gallons					
Outlet Isolation <input type="checkbox"/> Manual <input type="checkbox"/> Electric <input type="checkbox"/> Other: _____				Quantity of Containers: _____					
Prover Divert <input type="checkbox"/> Manual <input type="checkbox"/> Electric <input type="checkbox"/> Other: _____				Sample Container "U" Stamp: <input type="checkbox"/> Yes <input type="checkbox"/> No					
Prover Takeoff & Return <input type="checkbox"/> Manual <input type="checkbox"/> Electric <input type="checkbox"/> Other: _____				Manual Sample Probe: <input type="checkbox"/> Yes <input type="checkbox"/> No					
3-Way Divert Valve <input type="checkbox"/> Manual <input type="checkbox"/> Electric <input type="checkbox"/> Other: _____				Prover <input type="checkbox"/> Yes <input type="checkbox"/> No					
Back Pressure Valves <input type="checkbox"/> Yes <input type="checkbox"/> No				Prover Type: <input type="checkbox"/> BI-Di <input type="checkbox"/> SVP <input type="checkbox"/> Other: _____					
Location(s) for Installation: <input type="checkbox"/> Outlet <input type="checkbox"/> Divert Line <input type="checkbox"/> Both <input type="checkbox"/> No				Stationery or Portable: _____					
Valve Type: _____				Prover Connections: _____					
Valve Operator: <input type="checkbox"/> Pneumatic <input type="checkbox"/> Electric <input type="checkbox"/> Other: _____				Drip Pan Containment <input type="checkbox"/> Full <input type="checkbox"/> None <input type="checkbox"/> Other: _____					
Control on: <input type="checkbox"/> Flow <input type="checkbox"/> Pressure				Piping Insulation: <input type="checkbox"/> Yes <input type="checkbox"/> No <input type="checkbox"/> By Others					
Set Pressure: _____ psig				Heat Tracing <input type="checkbox"/> Yes <input type="checkbox"/> No					
Secondary Instrumentation				Other Equipment: _____					
Temperature Transmitter: <input type="checkbox"/> Transmitter Only <input type="checkbox"/> Indicating Transmitter <input type="checkbox"/> No									
Temperature Indicator: <input type="checkbox"/> Yes <input type="checkbox"/> No									
Test Thermowell: <input type="checkbox"/> Yes <input type="checkbox"/> No									
Pressure Transmitter: <input type="checkbox"/> Transmitter Only <input type="checkbox"/> Indicating Transmitter <input type="checkbox"/> No									
Pressure Indicator: <input type="checkbox"/> Yes <input type="checkbox"/> No									
Control				Other Required Information					
Controller: _____									
Local HMI: <input type="checkbox"/> Yes <input type="checkbox"/> No									
Local HOA: <input type="checkbox"/> Yes <input type="checkbox"/> No									
Power Distribution Panel: <input type="checkbox"/> Yes <input type="checkbox"/> No									
Other Control: _____									

¹ These examples are for illustration purposes only. They are not to be considered exclusive or exhaustive in nature. API makes no warranties, express or implied for reliance on or any omissions from the information contained in this document.

ANNEX B (INFORMATIVE) DETERMINING NORMAL OPERATING CONDITIONS

B.1 General

~~Lease automatic custody transfer (LACT) flow meters should be calibrated (i.e., proved) under conditions as close as practical to the conditions under which they normally operate as specified in API MPMS Chapter 4.8. This annex includes one definition and two methods to identify normal operating conditions of a LACT metering system.~~

~~Authorities having jurisdiction may use the definition of normal operating conditions as described in B.2.~~

~~Either of the two methods described in B.3 to assess normal operating conditions should be chosen by the companies, depending on suitability to individual measurement systems and each metering application.~~

~~Companies may use the definition for LACT units.~~

B.2 Definition for Normal Operating Conditions

~~Normal operating conditions: a range of operating conditions that can be expected to occur through a metering system as determined from historical data.~~

~~Two methods of determining the range of normal operating conditions are listed in B.3.~~

B.3 Methods for Implementation

~~Meter performance method: the range of process conditions measured during previous proves that have occurred within no more than the past two years where the resulting meter factors were within $\pm 0.25\%$ of the mean of the meter factors, plus or minus the additional tolerances in Table B.1.~~

~~or~~

~~Frequency of occurrence method: the process conditions within the 5th percentile to 95th percentile of the operating values calculated from the frequency of occurrence (as specified in Equation B.1) based on historical data [such as data from quantity transaction records (QTRs) or proving reports] within the previous two years, excluding data from no flow periods, plus or minus the additional tolerances in Table B.1.~~

Table B.1—Additional Tolerances

Variable	Additional Tolerance
Pressure	Greater of $\pm 10\%$ or ± 20 psi
Temperature	± 10 °F
Flow Rate	$\pm 10\%$
Density	± 5 °API

~~For the purpose of this annex, negative pressure results obtained after applying the tolerances in Table B.1 should be converted to a value of zero (0). Refer to B.7 and B.8 for examples.~~

This document is not an API Standard; it is under consideration within an API technical committee but has not received all approvals required to become an API Standard. It shall not be reproduced or circulated or quoted, in whole or in part, outside of API committee activities except with the approval of the Chairman of the committee having jurisdiction and staff of the API Standards Dept. Copyright API. All rights reserved.

~~Additionally, for both the meter performance method and the frequency-of-occurrence method, if a prove at conditions beyond those from the previous data results in a meter factor (MF) within $\pm 0.25\%$ of the mean of the meter factors covering the data set, those conditions are considered normal.~~

The equation for the frequency of occurrence for a desired percentile point is:

$$Y_p = Y_L + \left(\frac{P_{(n)} - cF_{below}}{F_t} \right) \times i \quad (B.1)$$

Where:

Y_p is the frequency of occurrence;

Y_L is the true lower limit of the class interval containing the percentile point;

$P_{(n)}$ is the percentile point expressed as a decimal;

n is the total number of scores in the distribution;

cF_{below} is the cumulative frequency for the class interval immediately below the class interval containing the percentile point;

F_t is the number of scores within the class interval containing the percentile point;

i is the width of the class interval containing the percentile point

B.4 Implementation Guidance

~~A year can be defined as a calendar year or a rolling 12-month period, but in no case should the data set contain more than 35 months of data. For example, data from calendar years 2017 and 2018 can be used in the calculation of normal operating conditions throughout 2019, but data from calendar year 2017 cannot be used in the calculation for calendar year 2020.~~

~~To address short-term abnormal process conditions that could expand the range to excessive limits, the lower 5% and upper 5% of the process data is excluded from the range calculation when using QTR data. Calculations shall use the most granular average QTR data available, with bins set up at the discrimination levels prescribed in API MPMS Chapter 12. In the case of a meter zero, transmitter adjustment, or similar indication adjustment, the calculation shall only use QTR data for that variable from that point in time forward. Users may set a new start point for some or all variables for known changes in process conditions. When using a limited number of QTR data sets, it is possible that the resulting range will be wider than the range from the minimum and maximum values used for the calculation. The final results can be rounded to one more significant figure than the discrimination of the input data for ease of use.~~

~~When using QTR data to determine flow rates for the purposes of calculating normal operating conditions, the use of the best available data is acceptable. This could include using the flow time and total quantity to calculate an average flow rate.~~

~~NOTE "Bin" is the term used in histograms to designate the interval for each set of data in the histogram. In the examples below, the intervals for pressure, temperature, and density are all set to 1.0.~~

This document is not an API Standard; it is under consideration within an API technical committee but has not received all approvals required to become an API Standard. It shall not be reproduced or circulated or quoted, in whole or in part, outside of API committee activities except with the approval of the Chairman of the committee having jurisdiction and staff of the API Standards Dept. Copyright API. All rights reserved.

B.5 Frequency of Calculation

Normal operating conditions should be updated at least once per calendar year. The results of the most recent calculation of normal operating conditions should be readily available. Calculation results should be stored according to company policy or any applicable regulation.

B.6 Mechanical Recorders

For LACT units with mechanical recorders, the most granular average data available is likely to be monthly or semi-monthly data. This may introduce difficulty in ensuring proving conditions are within normal operating conditions, as the averaged data will not be representative of the highs and lows encountered at the meter throughout the averaged time period. As such, it is recommended to use the meter performance method for mechanical recorders.

B.7 Meter Performance Method—Example Calculations²

The following examples are based on the 10-month data set of temperature, pressure, flow rate, and API gravity in Table B.2.

Table B.2—Sample Data Set

Period	Meter Temperature (°F)	Meter Pressure (psig)	Meter Flow Rate (bbl/h)	Product Gravity (°API)	Meter Factor	Meter Factor Deviation %	
Month 1	59.4	20.6	514.3	53.5	1.0015		
Month 2	77.6	21.4	582.6	64.9	1.0008	-0.07	
Month 3	42.4	29.2	559.4	34.7	1.002	0.12	
Month 4	84.8	53.3	444.3	42.2	1.0004	-0.16	
Month 5	81.9	14.0	414.0	41.8	1.0007	0.03	
Month 6	82.5	18.1	458.0	46.5	1.0012	0.05	
Month 7	94.4	21.6	479.0	42.0	1.0006	-0.06	
Month 8	95.0	19.1	573.0	36.3	1.0001	-0.05	
Month 9	83.1	20.5	559.0	37.8	1.0004	0.03	
Month 10	70.7	18.0	477.0	42.2	1.0005	0.01	
					MF mean (average)	1.0008	
					MF mean -0.25 %	0.9983	
					MF mean +0.25 %	1.0033	

All data is within the mean MF ± 0.25 %.

²The examples are for illustration purposes only. They are not to be considered exclusive or exhaustive in nature. API makes no warranties, express or implied, for reliance on or any omissions from the information contained in this document.

B.7.1 Example Calculation of Normal Operating Conditions (Flow Rate)

Meter flow rate range = ~~min to max~~ = 414.0 bbl/h to 582.6 bbl/h

Normal operating meter flow rate = Range \pm Table B.1 tolerance ($\pm 10\%$)

Low end = ~~414.0~~ $- 10\%$ = 372.6 bbl/h

High end = ~~582.6~~ $+ 10\%$ = 640.9 bbl/h

Normal operating meter flow rate = 372.6 to 640.9 bbl/h

B.7.2 Example Calculations of Normal Operating Conditions (Temperature)

Meter temperature range = ~~min to max~~ = 42.4 °F to 95.0 °F

Normal operating meter temperature = Range \pm Table B.1 tolerance ($\pm 10\%$)

Low end = ~~42.4~~ $- 10.0$ = 32.4 °F

High end = ~~95.0~~ $+ 10.0$ = 105.0 °F

Normal operating meter temperature = 32.4 °F to 105.0 °F

B.7.3 Example Calculations of Normal Operating Conditions (Pressure)

Meter pressure range = ~~min to max~~ = 14.0 psig to 53.3 psig

Normal operating meter pressure = Range \pm Table B.1 tolerance (greater of $\pm 10\%$ or ± 20 psig)

Low end = ~~14.0~~ $- 20.0$ = ~~6.0 psig~~ \rightarrow Convert negative pressure value to 0.0 psig

High end = ~~53.3~~ $+ 20.0$ = 73.3 psig

Normal operating meter pressure = 0.0 psig to 73.3 psig

B.7.4 Example Calculations of Normal Operating Conditions (Density)

API gravity range = ~~min to max~~ = 34.7 °API to 64.9 °API

Normal operating API gravity = Range \pm Table B.1 tolerance ($\pm 5\%$)

Low end = ~~34.7~~ $- 5.0$ = 29.7 °API

High end = ~~64.9~~ $+ 5.0$ = 69.9 °API

Normal operating API gravity = 29.7 °API to 69.9 °API

This document is not an API Standard; it is under consideration within an API technical committee but has not received all approvals required to become an API Standard. It shall not be reproduced or circulated or quoted, in whole or in part, outside of API committee activities except with the approval of the Chairman of the committee having jurisdiction and staff of the API Standards Dept. Copyright API. All rights reserved.

B.8 Frequency of Occurrence Method—Example Calculations³

The following examples are based on the 12-month data set of flow rate, pressure, temperature, and density in Table B.3.

NOTE—Other calculation methods and routines that achieve similar results, such as a spreadsheet function, can be used.

Table B.3—Sample Data Set

Data Point	Flow Rate (bbl/h)	Pressure (psig)	Temperature (°F)	Density (°API)
Month 1	35.00	215	78.0	35.0
Month 2	31.00	227	65.0	34.0
Month 3	30.00	230	68.0	35.0
Month 4	28.00	243	47.0	36.0
Month 5	33.00	254	44.0	36.0
Month 6	32.00	265	55.0	37.0
Month 7	34.00	237	58.0	35.0
Month 8	45.00	226	70.0	35.0
Month 9	42.00	234	71.0	37.0
Month 10	40.00	230	63.0	34.0
Month 11	39.00	224	64.0	37.0
Month 12	40.00	268	66.0	36.0

B.8.1 Example Calculation of Normal Operating Conditions (Flow Rate)

STEP 1: Determine the data range.

³The examples are for illustration purposes only. They are not to be considered exclusive or exhaustive in nature. API makes no warranties, express or implied for reliance on or any omissions from the information contained in this document.

This document is not an API Standard; it is under consideration within an API technical committee but has not received all approvals required to become an API Standard. It shall not be reproduced or circulated or quoted, in whole or in part, outside of API committee activities except with the approval of the Chairman of the committee having jurisdiction and staff of the API Standards Dept. Copyright API. All rights reserved.

Table B.4—Sample Data Range: Flow Rate (bbl/h)

28.00	39.00
29.00	40.00
30.00	41.00
31.00	42.00
32.00	43.00
33.00	44.00
34.00	45.00
35.00	46.00
36.00	
37.00	
38.00	

STEP 2: Compile frequency F_i and cumulative frequency cF .

Table B.5—Frequency and Cumulative Frequency: Flow Rate (bbl/h)

Y	F_i	cF	Y	F_i	cF
27.00	0	0	38.00	0	7
28.00	1	1	39.00	1	8
29.00	0	1	40.00	2	10
30.00	1	2	41.00	0	10
31.00	1	3	42.00	1	11
32.00	1	4	43.00	0	11
33.00	1	5	44.00	0	11
34.00	1	6	45.00	1	12
35.00	1	7	46.00	0	12
36.00	0	7			
37.00	0	7			

STEP 3: Calculate percentile $P_{(n)}$.

$$P_{(n)} = \text{Percentile} \times n$$

95th-percentile:

$$P_{(n-95)} = 0.95 * 12 = 11.4$$

5th-percentile:

$$P_{(n-05)} = 0.05 * 12 = 0.6$$

This document is not an API Standard; it is under consideration within an API technical committee but has not received all approvals required to become an API Standard. It shall not be reproduced or circulated or quoted, in whole or in part, outside of API committee activities except with the approval of the Chairman of the committee having jurisdiction and staff of the API Standards Dept. Copyright API. All rights reserved.

~~STEP 4: Lookup Y_L . Select the interval with the value of cF that is less than or equal to $P_{(n)}$ that has an F value greater than 0. If the value of $P_{(n-0.5)}$ is less than 1, select the lowest value.~~

~~$$Y_{L-95} = 42$$~~

~~$$Y_{L-05} = 28$$~~

~~STEP 5: Lookup F_i . Find the number of scores in the interval containing the percentile score (rounded up).~~

~~$$F_{i-95} = 1$$~~

~~$$F_{i-05} = 1$$~~

~~STEP 6: Lookup cF_{below} . Find the cumulative frequency of the interval immediately below the Y_{L-95}/Y_{L-05} .~~

~~$$cF_{\text{below-95}} = 10$$~~

~~$$cF_{\text{below-05}} = 0$$~~

~~STEP 7: Calculate Y_p .~~

~~$$\begin{aligned} Y_{p-95} &= 42 + (((11.4 - 10)/1) * 1) \\ &= 42 + 1.4 = 43.4 \end{aligned}$$~~

~~$$\begin{aligned} Y_{p-05} &= 28 + (((0.6 - 0)/1) * 1) \\ &= 28 + 0.6 = 28.6 \end{aligned}$$~~

~~$$\text{Low end} = 28.6 - 10\% = 25.7$$~~

~~$$\text{High end} = 43.4 + 10\% = 47.7$$~~

~~$$\text{Normal operating conditions (flow rate)} = 25.7 \text{ to } 47.7$$~~

This document is not an API Standard; it is under consideration within an API technical committee but has not received all approvals required to become an API Standard. It shall not be reproduced or circulated or quoted, in whole or in part, outside of API committee activities except with the approval of the Chairman of the committee having jurisdiction and staff of the API Standards Dept. Copyright API. All rights reserved.

B.8.2 Example Calculation of Normal Operating Conditions (Pressure)

Table B.6—Sample Data Range: Pressure (psig)

215	226	237	248	259
216	227	238	249	260
217	228	239	250	261
218	229	240	251	262
219	230	241	252	263
220	231	242	253	264
221	232	243	254	265
222	233	244	255	266
223	234	245	256	267
224	235	246	257	268
225	236	247	258	269

This document is not an API Standard; it is under consideration within an API technical committee but has not received all approvals required to become an API Standard. It shall not be reproduced or circulated or quoted, in whole or in part, outside of API committee activities except with the approval of the Chairman of the committee having jurisdiction and staff of the API Standards Dept. Copyright API. All rights reserved.

$$Y_{L-95} = 265$$

$$Y_{L-05} = 215$$

$$F_{t-95} = 1$$

$$F_{t-05} = 1$$

$$cF_{\text{below-95}} = 10$$

$$cF_{\text{below-05}} = 0$$

$$Y_{p-95} = 265 + (((11.4 - 10)/1) * 1)$$

$$= 265 + 1.4 = 266.4$$

$$Y_{p-05} = 215 + (((0.6 - 0)/1) * 1)$$

$$= 215 + 0.6 = 215.6$$

$$\text{Low end} = 215.6 - 10\% = 194$$

$$\text{High end} = 266.4 + 10\% = 293$$

Normal operating conditions (pressure) = 194 to 293

B.8.3 Example Calculation of Normal Operating Conditions (Temperature)

Table B.8—Sample Data Range: Temperature (°F)

44.0	55.0	66.0	77.0
45.0	56.0	67.0	78.0
46.0	57.0	68.0	79.0
47.0	58.0	69.0	
48.0	59.0	70.0	
49.0	60.0	71.0	
50.0	61.0	72.0	
51.0	62.0	73.0	
52.0	63.0	74.0	
53.0	64.0	75.0	
54.0	65.0	76.0	

This document is not an API Standard; it is under consideration within an API technical committee but has not received all approvals required to become an API Standard. It shall not be reproduced or circulated or quoted, in whole or in part, outside of API committee activities except with the approval of the Chairman of the committee having jurisdiction and staff of the API Standards Dept. Copyright API. All rights reserved.

Table B.9—Frequency and Cumulative Frequency: Temperature (°F)

Y	F _T	eF
43.0	0	0
44.0	1	1
45.0	0	1
46.0	0	1
47.0	1	2
48.0	0	2
49.0	0	2
50.0	0	2
51.0	0	2
52.0	0	2
53.0	0	2

Y	F _T	eF
54.0	0	2
55.0	1	3
56.0	0	3
57.0	0	3
58.0	1	4
59.0	0	4
60.0	0	4
61.0	0	4
62.0	0	4
63.0	1	5
64.0	1	6

Y	F _T	eF
65.0	1	7
66.0	1	8
67.0	0	8
68.0	1	9
69.0	0	9
70.0	1	10
71.0	1	11
72.0	0	11
73.0	0	11
74.0	0	11
75.0	0	11

Y	F _T	eF
76.0	0	11
77.0	0	11
78.0	1	12
79.0	0	12

This document is not an API Standard; it is under consideration within an API technical committee but has not received all approvals required to become an API Standard. It shall not be reproduced or circulated or quoted, in whole or in part, outside of API committee activities except with the approval of the Chairman of the committee having jurisdiction and staff of the API Standards Dept. Copyright API. All rights reserved.

$$Y_{L-95} = 44$$

$$Y_{L-05} = 71$$

$$F_{L-95} = 1$$

$$F_{L-05} = 1$$

$$eF_{\text{below-95}} = 10$$

$$eF_{\text{below-05}} = 0$$

$$Y_{p-95} = 71 + (((11.4 - 10)/1)*1)$$

$$= 71 + 1.4 = 72.4$$

$$Y_{p-05} = 44 + (((0.6 - 0)/1)*1)$$

$$= 44 + 0.6 = 44.6$$

$$\text{Low end} = 44.6 - 10 = 34.6$$

$$\text{High end} = 72.4 + 10 = 82.4$$

Normal operating conditions (temperature) = 34.6 to 82.4

B.8.4 Example Calculation of Normal Operating Conditions (Density)

Table B.10—Sample Data Range: Density (°API)

34.0
35.0
36.0
37.0
38.0

Table B.11—Frequency and Cumulative Frequency: Density (°API)

Y	F _T	eF
33.0	0	0
34.0	2	2
35.0	4	6
36.0	3	9
37.0	3	12
38.0	0	12

This document is not an API Standard; it is under consideration within an API technical committee but has not received all approvals required to become an API Standard. It shall not be reproduced or circulated or quoted, in whole or in part, outside of API committee activities except with the approval of the Chairman of the committee having jurisdiction and staff of the API Standards Dept. Copyright API. All rights reserved.

$$Y_{L-95} = 36$$

$$Y_{L-05} = 34$$

$$F_{t-95} = 3$$

$$F_{t-05} = 2$$

$$cF_{below-95} = 1$$

$$cF_{below-05} = 1$$

$$\begin{aligned} Y_{p-95} &= 36 + (((11.4 - 6)/3)*1) \\ &= 36 + 1.8 = 37.8 \end{aligned}$$

$$\begin{aligned} Y_{p-05} &= 34 + (((0.6 - 0)/2)*1) \\ &= 34 + 0.3 = 34.3 \end{aligned}$$

$$\text{Low end} = 34.3 - 5 = 29.3$$

$$\text{High end} = 37.8 + 5 = 42.8$$

$$\text{Normal operating conditions (density)} = 29.3 \text{ to } 42.8$$

This document is not an API Standard; it is under consideration within an API technical committee but has not received all approvals required to become an API Standard. It shall not be reproduced or circulated or quoted, in whole or in part, outside of API committee activities except with the approval of the Chairman of the committee having jurisdiction and staff of the API Standards Dept. Copyright API. All rights reserved.

BIBLIOGRAPHY

- [1] API MPMS Chapter 4.1, *Proving Systems – Introduction*
- [2] API MPMS Chapter 4.6, *Proving Systems – Pulse Interpolation*
- [3] API MPMS Chapter 5.1, *Metering – General Considerations for Measurement by Meters*
- [4] API MPMS Chapter 5.2, *Metering – Measurement of Liquid Hydrocarbons by Displacement Meters*
- [5] API MPMS Chapter 5.3, *Metering – Measurement of Liquid Hydrocarbons by Turbine Meters*
- [6] API MPMS Chapter 5.6, *Metering – Measurement of Liquid Hydrocarbons by Coriolis Meters*
- [7] API MPMS Chapter 5.8, *Metering – Measurement of Liquid Hydrocarbons by Ultrasonic Flow Meters*
- [8] [API MPMS Chapter 6.2A, Truck and Rail Loading and Unloading Measurement Systems](#)
- [7][9] [API MPMS Chapter 6.3A, Pipeline and Marine Loading/Unloading Measurement Systems](#)
- [8][10] API MPMS Chapter 8.3, *Standard Practice for Mixing and Handling of Liquid Samples of Petroleum and Petroleum Products*
- [11] API MPMS Chapter 12 (all sections), *Calculation of Petroleum Quantities Using Dynamic Measurement Methods*
- [9][12] [API MPMS Chapter 13.2, Statistical Methods of Evaluating Meter Proving Data](#)
- [10][13] API Std 610, *Centrifugal Pumps for Petroleum, Petrochemical and Natural Gas Industries*
- [14][14] API Std 674, *Positive Displacement Pumps – Reciprocating*
- [12][15] API Std 676, *Positive Displacement Pumps – Rotary*
- [13][16] API RP 686, *Recommended Practice for Machinery Installation and Installation Design*
- [14][17] API TR 2570, *Continuous On-line Measurement of Water Content in Petroleum (Crude Oil and Condensate)*
- [15][18] API TR 2578, *Flow Conditioner Installation and Effects on Turbine Meters*
- [16][19] ASTM D1265, *Standard Practice for Sampling Liquefied Petroleum (LP) Gases, Manual Method*
- [17][20] ASTM D3700, *Standard Practice for Obtaining LPG Samples Using a Floating Piston Cylinder*
- [18][21] ASTM D4057, *Standard Practice for Manual Sampling of Petroleum and Petroleum Products*
- [19][22] ASTM D4177, *Standard Practice for Automatic Sampling of Petroleum and Petroleum Products*
- [20][23] GPA 2174, *Obtaining Pressurized Liquid Hydrocarbons Samples*
- [24][24] GPA 2177, *Analysis of Natural Gas Liquids by Gas Chromatography*
- [22][25] GPA 8173, *Standard for Converting Mass of Natural Gas Liquids and Vapors to Equivalent Liquid Volumes*
- [23][26] GPA 8182, *Standard for Mass Measurement of Natural Gas Liquids and Other Hydrocarbons*